
Dial Indicator, Lug Back
2mm, 0,001mm, Shockproof

Item number: 2113S-10





Description

Standard Type, 2 / 5 mm Range, 0,001 / 0,005 mm Graduation


This is a standard, metric dial indicator. It offers you the following benefits:


- Bezel clamp and lifting lever (optional) can be attached to either right or left side. They can be easily installed and removed without tools.
- No through screw holes on the frame and secure adhesion between the bezel and the crystal as well as the use of an O-ring prevents water or oil penetration.

Specification

Range:	**2 mm**
Range per rev.:	**0.2 mm**
Graduation:	**0.001 mm**
MPE any 1/10 revolution:	**2.5 µm**
MPE any 1/2 revolution:	**4 µm**
MPE any 1 revolution:	**4.5 µm**
H MPE (Hysteresis):	**2 µm**
Mass:	**148 g**
R MPE (Repeatability):	**1 µm**
Scale:	**0-100-0**
C:	**57 mm**
D:	**17.7 mm**
Mass lug/plain:	**148/139 g**
E:	**20 mm**
F:	**16.9 mm**
G:	**15.6 mm**
I:	**7.6 mm**
Stem:	**8 mm**
Contact point:	**Carbide tipped, thread: M 2.5 x 0.45 mm**
Delivered:	**with certificate of inspection, limit indicators**
Digital/Analog:	**Analog**
Inch-Metric:	**Metric**
fu:	**2 µm**

Dimensions



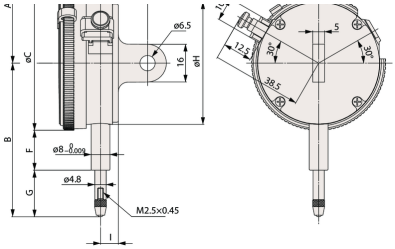

Spare parts

Consumable spares:



Contact Element Ball Point
7,3mm Length, Carbide, Metric
901312