



Dial Indicator, Lug Back, AGD/ANSI
2", 0,001", Shockpr., One Rev. Counter
Item number: 2424S-19



Description


This is a standard, inch dial indicator. It offers you the following benefits:


- Bezel clamp and lifting lever (optional) can be attached to either right or left side. They can be easily installed and removed without tools.
- No through screw holes on the frame and secure adhesion between the bezel and the crystal as well as the use of an O-ring prevents water or oil penetration.

Specification

Range:	2" Inch
Accuracy:	±0,002"
Range per rev.:	0.1"
Mass:	250 g
Scale:	0-100 (100-0)
C:	57 mm
D:	17.7 mm
Mass lug/plain:	250/225 g
E:	20.9 mm
F:	54.3 mm
G:	59.7 mm
I:	9.5 mm
Error of indication one revolution:	±0,002"
Stem:	9.52 mm / 0.375"
Contact point:	Carbide tipped, thread: 4-48UNF
Delivered:	with certificate of inspection, limit indicators
Digital/Analog:	Analog
Inch-Metric:	Inch
Type:	ANSI/AGD Standard

Dimensions

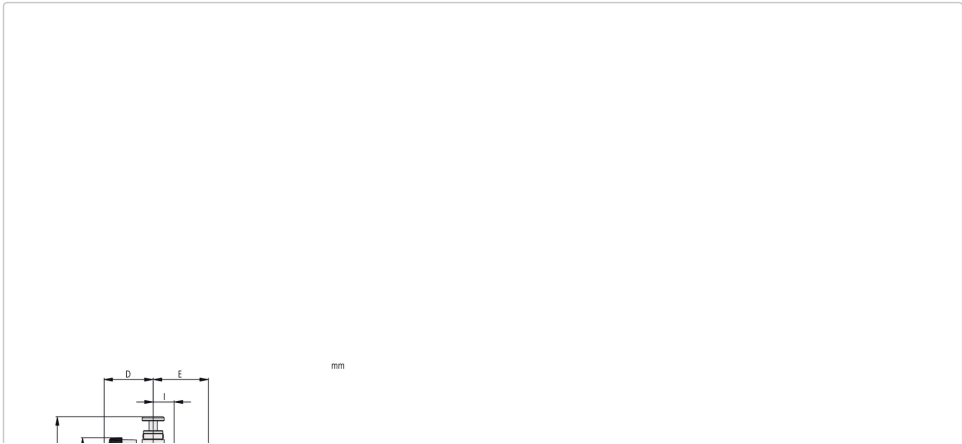



Spare parts

Consumable spares:



Contact Element Ball Point
1/4" Length, Carbide, Inch
21BZB005



Contact Element
21BZB056

Photo Not
 Available