



Reticle 
Catalogue

Thermal Imaging Riflescope

THERMION 2 LRF XL50

Non-scalable reticles

The values of the non-scalable reticles are correct in the following cases:

- when the magnification of the scope is set to minimum
- when "picture in picture" is activated



D50i



C50i



X54i



H50i



X50i



T54



M58i



X51Fi-300



M56Fi (Mil-Dot)




M57Fi (Mil-Dot)

Scalable reticles

Reticle parameters apply to all magnifications

D50i

Reticle parameters
(apply to all magnifications)

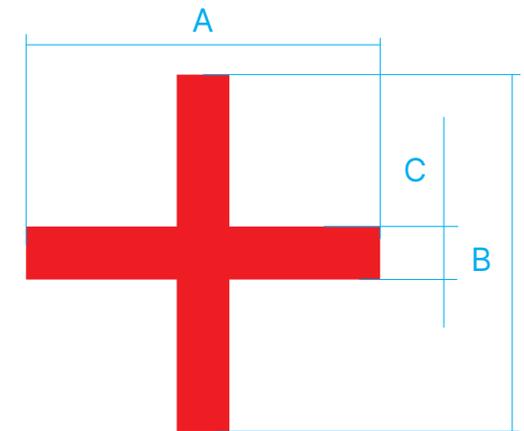

	MOA	cm @ 100 m
Section A	5.8	16.8
Section B	5.8	16.8
Section C	0.8	2.3



Thermal Imaging Riflescope

THERMION 2 LRF XL50

[↑ TO CONTENT](#)

C50i

Reticle parameters
(apply to all magnifications)

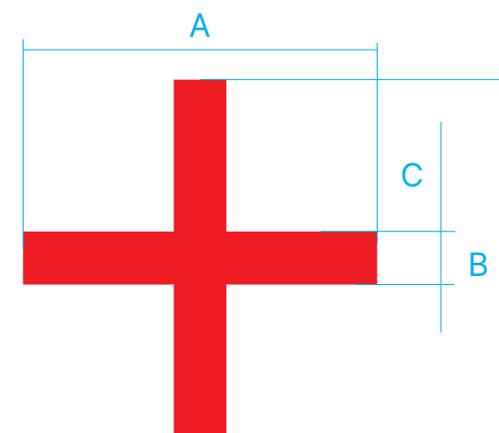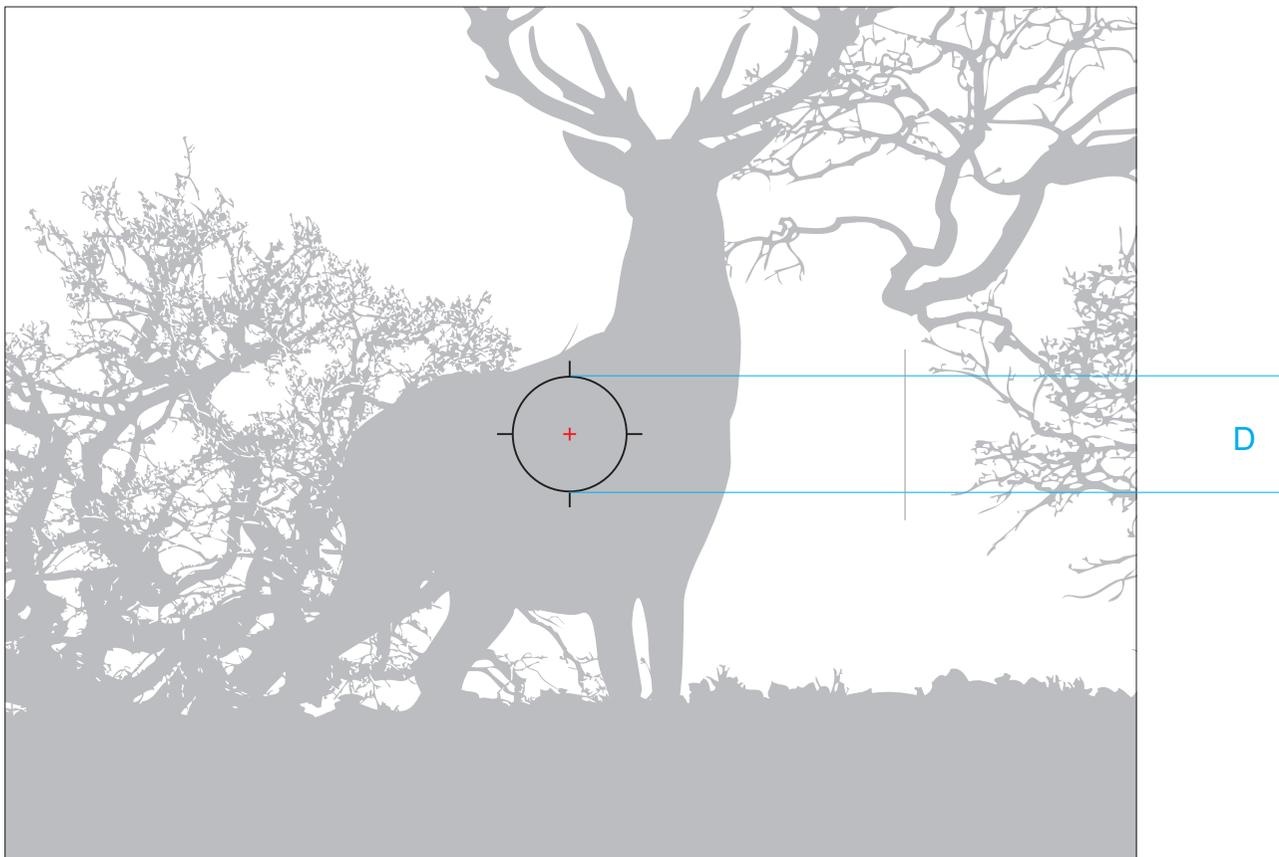

	MOA	cm @ 100 m
Section A	5.8	16.8
Section B	5.8	16.8
Section C	0.8	2.3
Section D	68.8	200



Thermal Imaging Riflescope

THERMION 2 LRF XL50

[↑ TO CONTENT](#)

X54i

Reticle parameters
(apply to all magnifications)

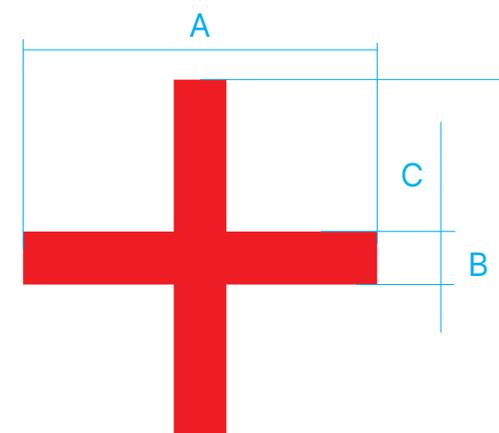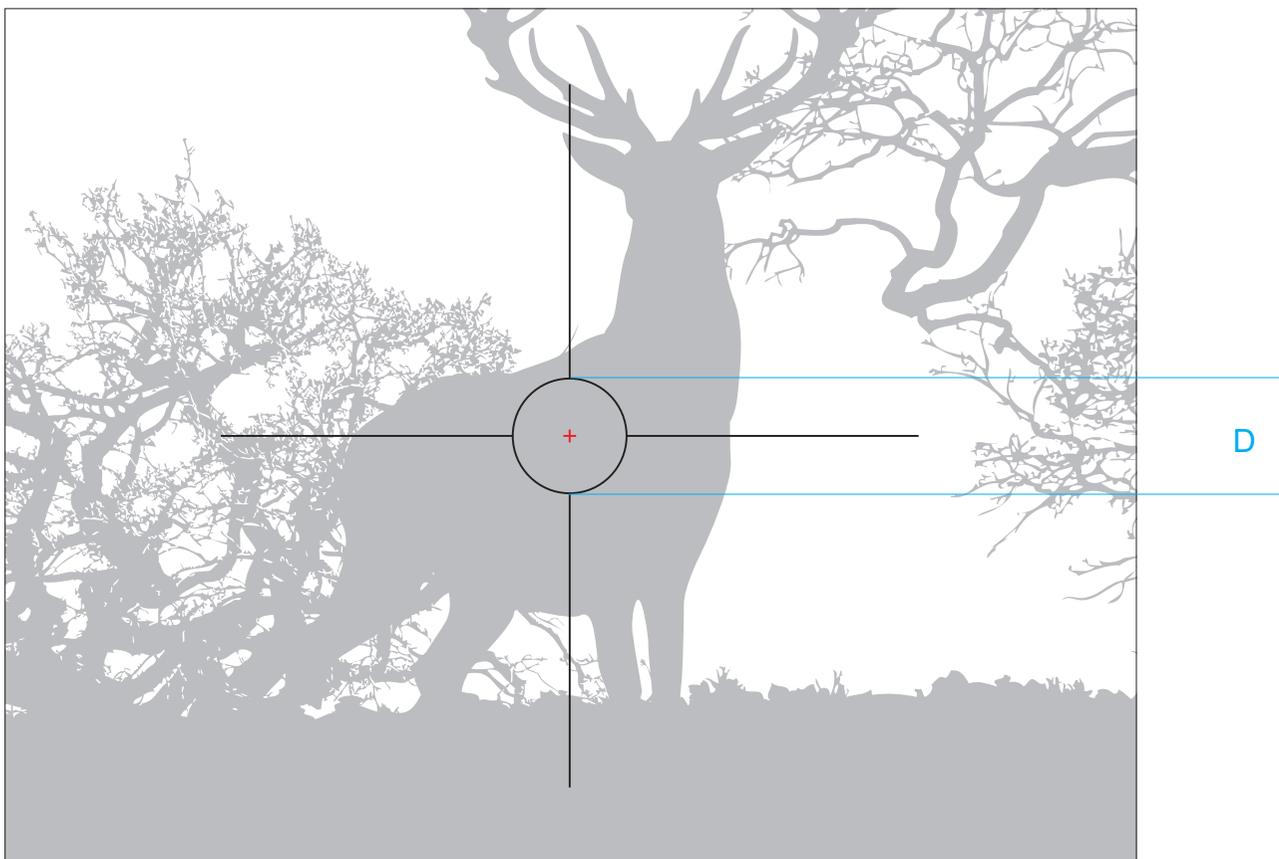


	MOA	cm @ 100 m
Section A	5.8	16.8
Section B	5.8	16.8
Section C	0.8	2.3
Section D	68.8	200

Thermal Imaging Riflescope


THERMION 2 LRF XL50

[↑ TO CONTENT](#)

H50i

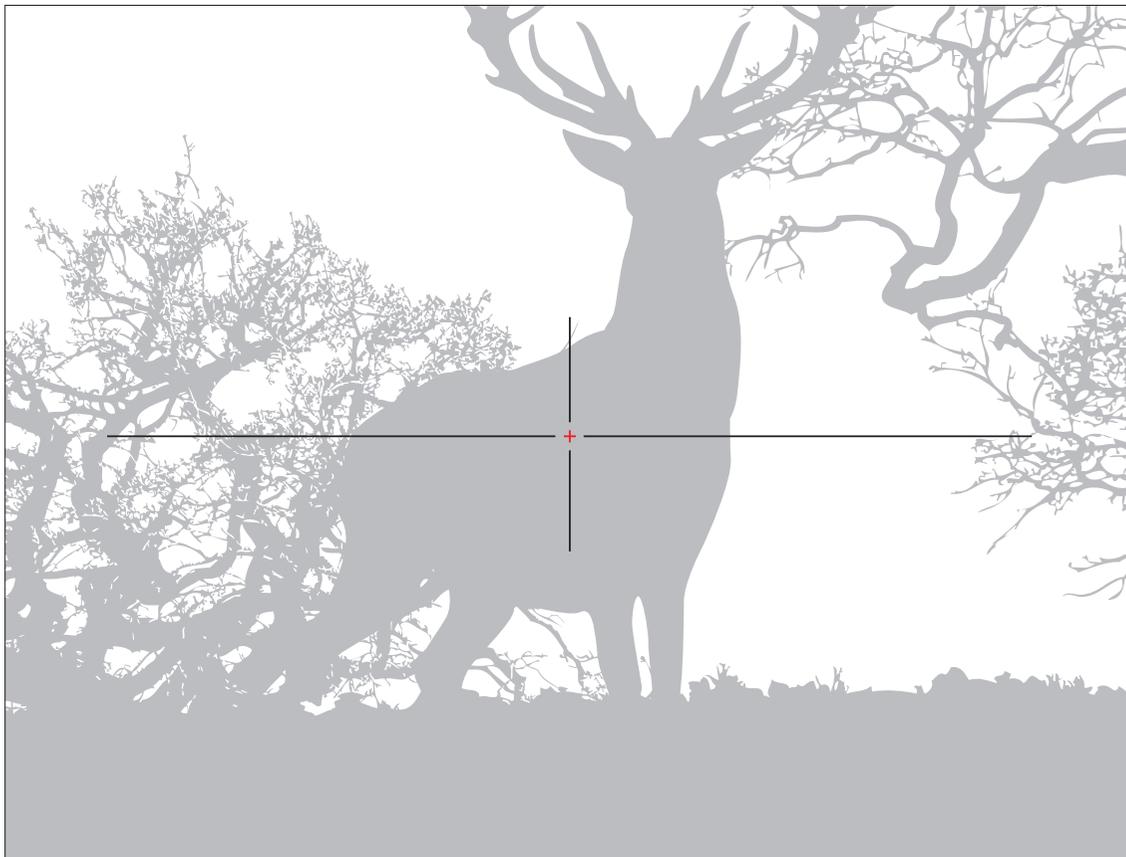

Reticle parameters
(apply to all magnifications)

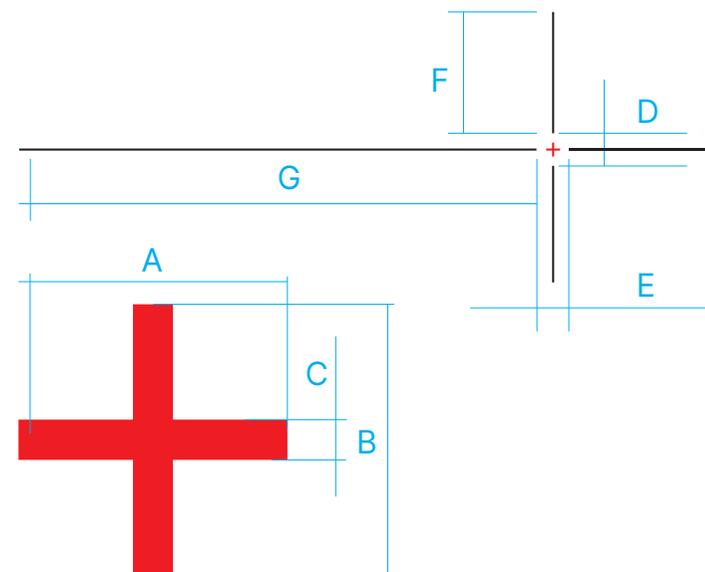


	MOA	cm @ 100 m
Section A	5.8	16.8
Section B	5.8	16.8
Section C	0.8	2.3
Section D	20	58
Section E	20	58
Section F	73	212
Section G	249.5	726

Thermal Imaging Riflescope


THERMION 2 LRF XL50

[↑ TO CONTENT](#)

X50i

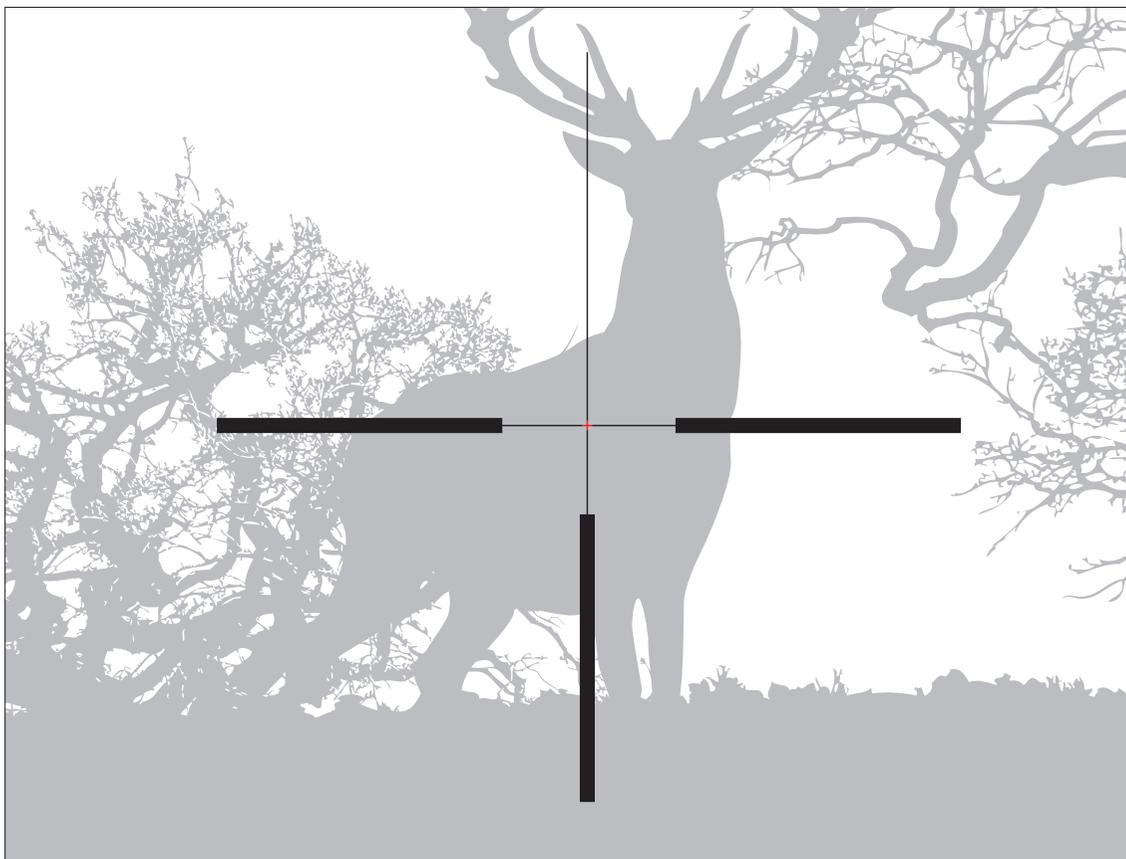

Reticle parameters
(apply to all magnifications)

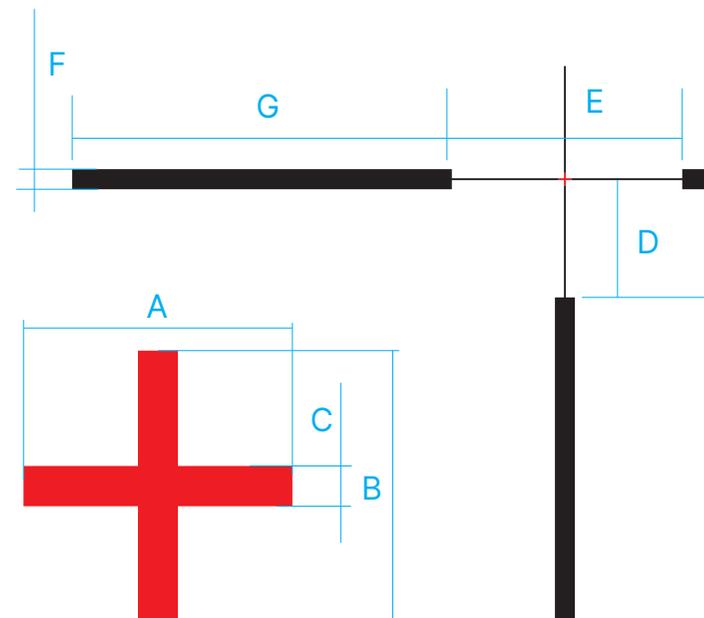

	MOA	cm @ 100 m
Section A	5.8	16.8
Section B	5.8	16.8
Section C	0.8	2.3
Section D	34.4	100
Section E	68.8	200
Section F	2.4	7
Section G	225	655

Thermal Imaging Riflescope


THERMION 2 LRF XL50

[↑ TO CONTENT](#)

T54



Reticle parameters
(apply to all magnifications)

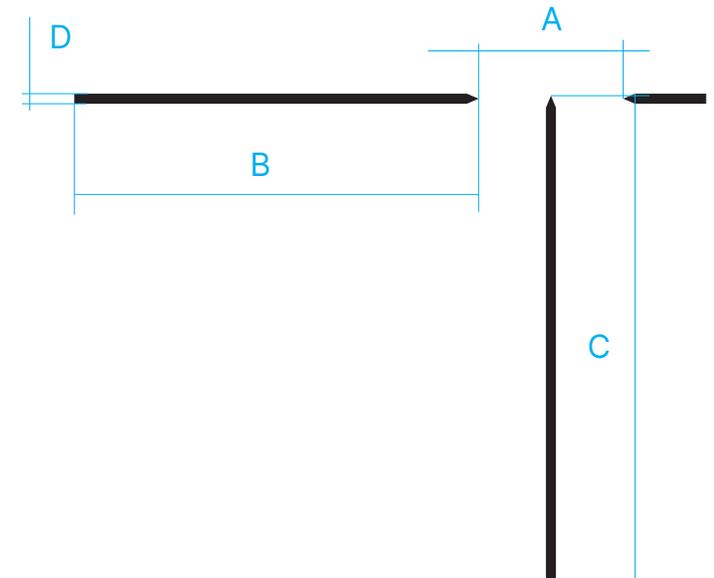


	MOA	cm @ 100 m
Section A	68.8	200
Section B	225	655
Section C	260	757
Section D	5.8	16.8

Thermal Imaging Riflescope


THERMION 2 LRF XL50

[↑ TO CONTENT](#)

M58i

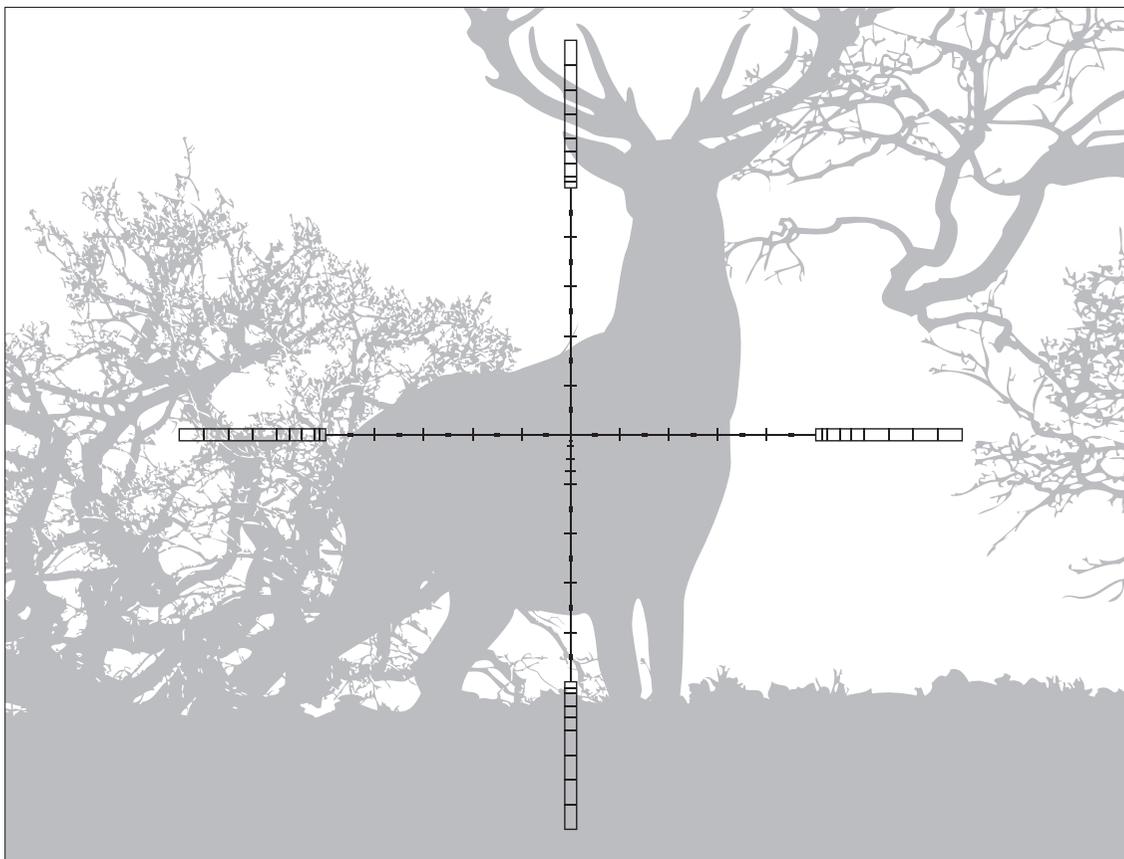

Reticle parameters
(apply to all magnifications)

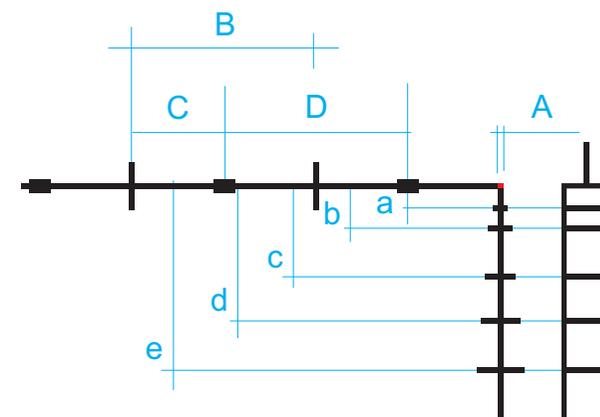


	MOA	cm @ 100 m
Section A	0.8	2.3 on 1.75x magnification
Section B	3.5	10 (1 mil) on 14x magnification
Section C	3.5	10 (1 mil) on 7x magnification
Section D	3.5	10 (1 mil) on 14x magnification
Section a	1 mil (10 cm @ 100 m) on 1.75x magnification	
Section b	1 mil (10 cm @ 100 m) on 3.5x magnification	
Section c	1 mil (10 cm @ 100 m) on 7x magnification	
Section d	1 mil (10 cm @ 100 m) on 10.5x magnification	
Section e	1 mil (10 cm @ 100 m) on 14x magnification	

Thermal Imaging Riflescope


THERMION 2 LRF XL50

[↑ TO CONTENT](#)

X51 Fi-300

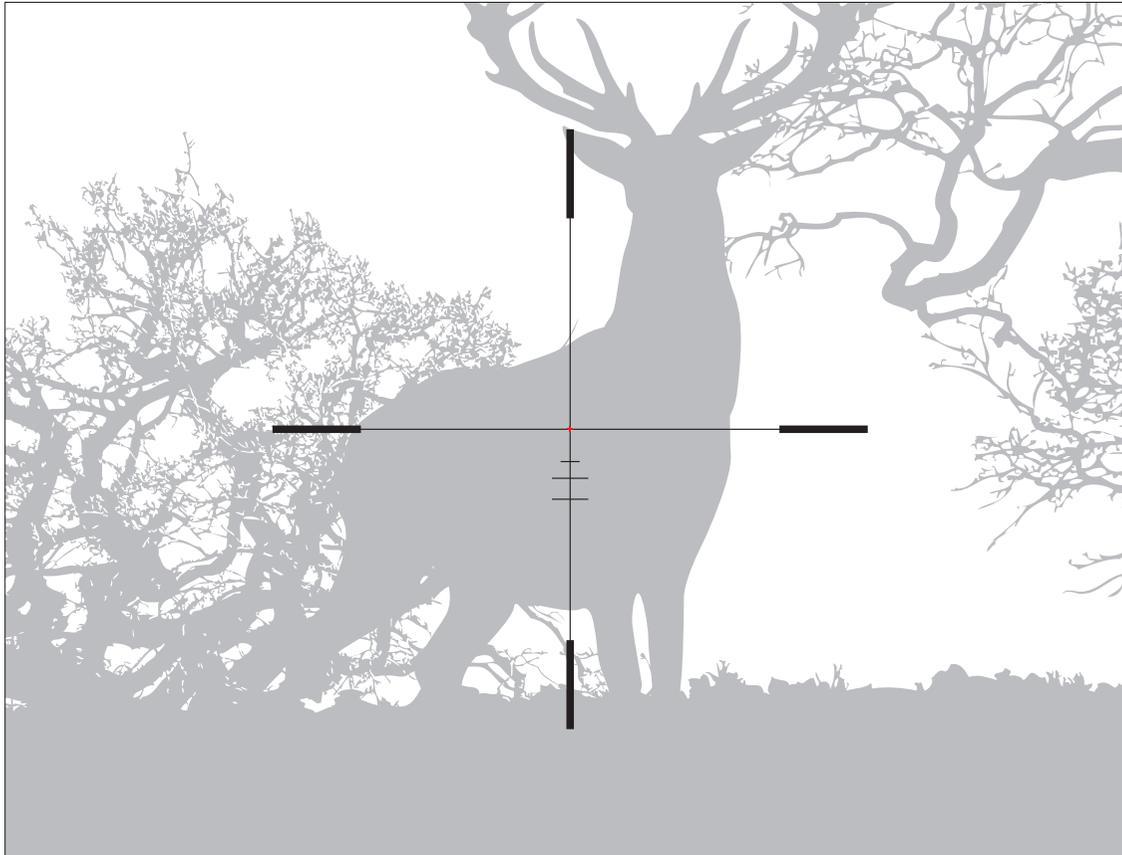


Reticle parameters
(apply to all magnifications)

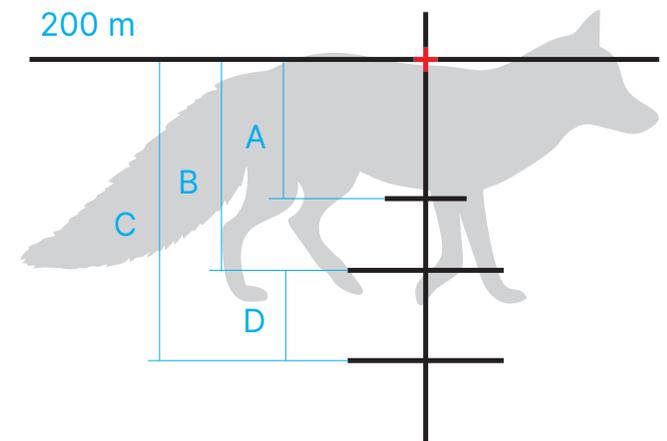


	200 m	300 m
Section A	15 cm (fox body)	23 cm (roe deer body)
Section B	23 cm (roe deer body)	35 cm (wild boar body)
Section C	35 cm (wild boar body)	50 cm (deer body)
Section D	—	15 cm (fox body)

Thermal Imaging Riflescope

THERMION 2 LRF XL50

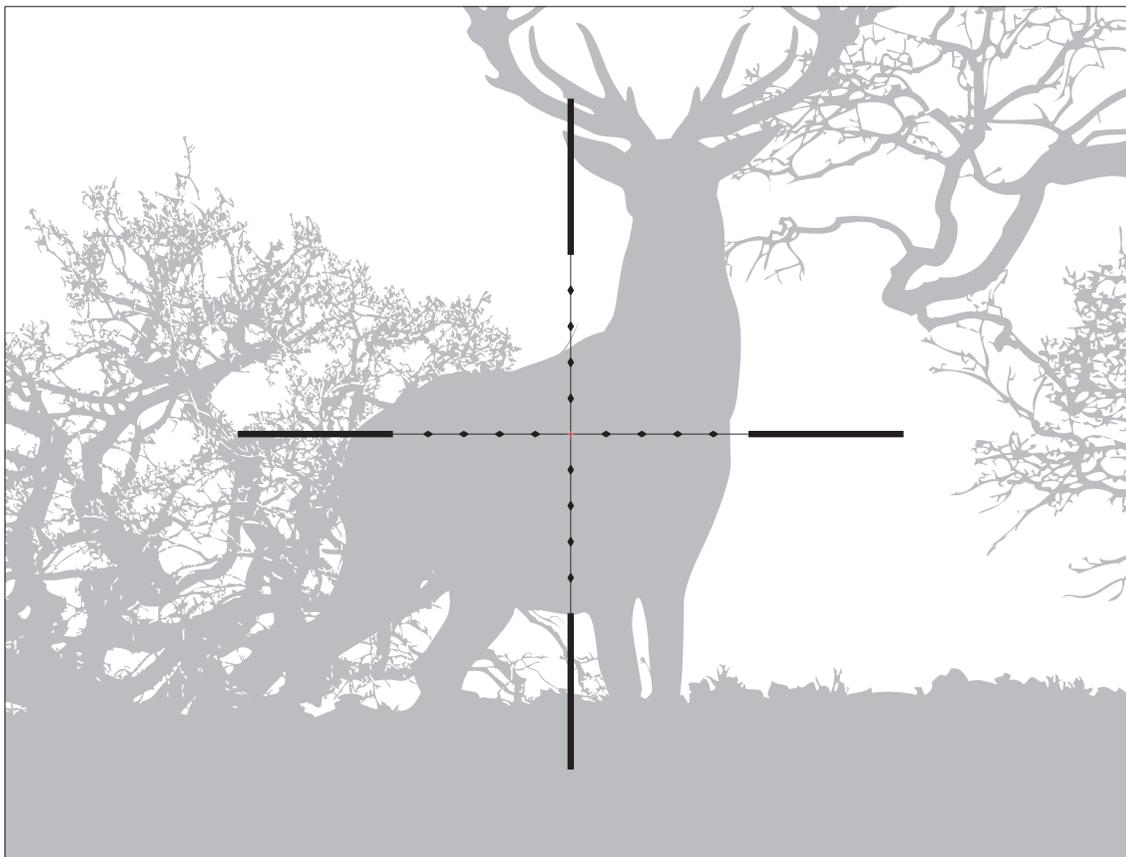

Reticle parameters
(apply to all magnifications)

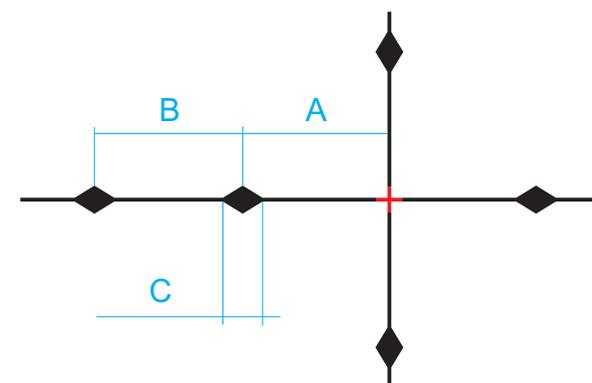

	MOA	CM @ 100 M
Section A	3.5	10 (1 MIL)
Section B	3.5	10 (1 MIL)
Section C	0.86	2.5 (0.25 MIL)


Thermal Imaging Riflescope

THERMION 2 LRF XL50


↑ TO CONTENT

M57Fi

SCALABLE

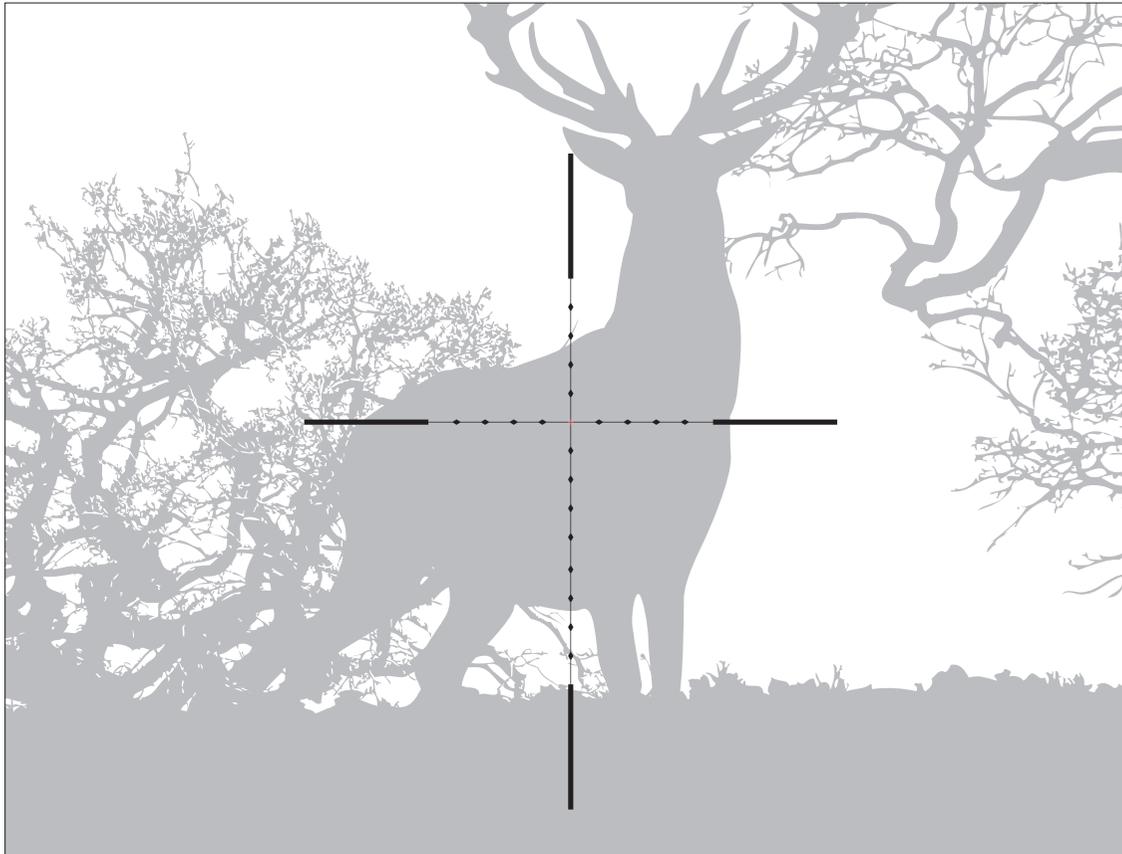

Reticle parameters
(apply to all magnifications)

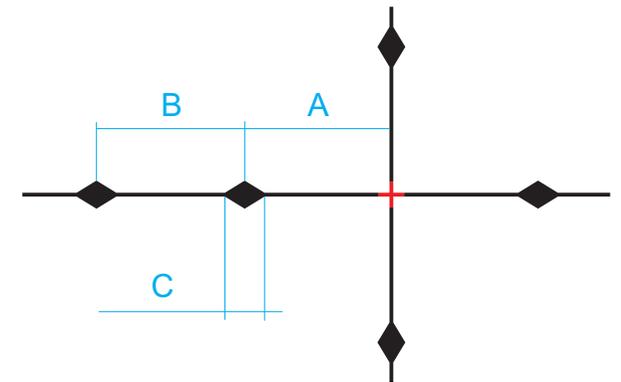

	MOA	CM @ 100 M
Section A	3.5	10 (1 MIL)
Section B	3.5	10 (1 MIL)
Section C	0.86	2.5 (0.25 MIL)

Thermal Imaging Riflescope

THERMION 2 LRF XL50

↑ TO CONTENT



www.pulsar-vision.com