


Drive-through scale KERN NFB

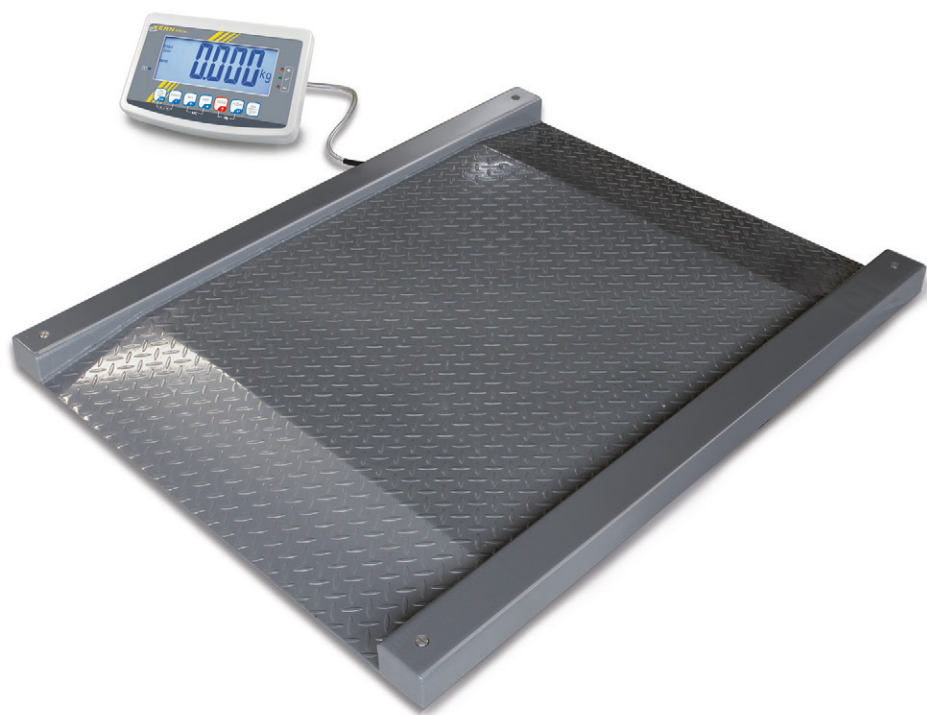

Note: For verified scales the weighing bridge must be fixed to the floor with a footplate pair

Limited range of tare with verifiable models 1/6 from [Max]

! Shipment via freight forwarder. Please ask for dimensions, gross weight, shipping costs

Industrial drive-through scale with two integrated access ramps and EC type approval [M]

- Features**

 - Robust drive-through scales for rapid weighing of e.g. wire cage trolleys, shelf trolleys, container trolleys, storage trolleys, sack trucks, truck scales, mobile cages, refuse bins etc.
 - **Weighing bridge with non-slip steel chequer plate, lacquered**, extremely resistant to bending
 - **4 Load cells steel, silicone-coated. IP67 protection:** Protection against dust and water, temporary use in wet areas is possible
 - **Display device KERN KFB-TM**, details see page 119
- Technical data**

 - Large backlit LCD display, digit height 52 mm
 - Overall dimensions WxDxH
- Accessories**

 - **Protective working cover** over the display device standard, can be reordered, KERN KFB-A02
 - **Rechargeable battery pack internal**, operating time up to 35 h without backlight, charging time approx. 10 h, must be ordered at purchase, KERN KFB-A01
- Options**

 - **2 Stand** to elevate display device, height of stand approx. 750 mm, KERN BFS-A07
 - **Signal lamp** for visual support of weighing with tolerance range, WxDxH 100x180x300 mm, see page 137, KERN CFS-A03
 - **Pair of base plates** to fix the weighing bridge to the floor, KERN BFS-A06
 - **Y cable** for parallel connection of two terminal devices to the RS-232 interface on the balance, e.g. signal lamp and printer, KERN CFS-A04
 - **Large display with superior display size**, digit height 76 mm. WxDxH 541x55x180 mm, details see page 141, KERN YKD-A02
 - **Suitable printers** see page 138

STANDARD

CAL EXT

RS 232

GLP PROTOCOL

PCS

RECIPE

TOL

MOVE

IP 67

230 V

DMS

2 DAYS

3 YEARS WARRANTY

only with printer

1

OPTION

DKD +3 DAYS

FACTORY

ACCU

M +3 DAYS

Model	Weighing range [Max] kg	Read-out [d] g	Net weight approx. kg	Verific. value [e] g	Minimum load [Min] kg	Weighing plate		Options			
								Verification		DKD Calibr. Certificate	
								M KERN		DKD KERN	
NFB 600K200M	600	200	131	200	4	A		965-230		963-130	
NFB 600K200LM	600	200	150	200	4	B		965-230		963-130	
NFB 1.5T0.5M	1500	500	131	500	10	A		965-230		963-130	
NFB 1.5T0.5LM	1500	500	150	500	10	B		965-230		963-130	

Note: For applications that require verification, please order verification at the same time, initial verification at a later date is not possible. Verification at the factory, we need to know the full address of the location of use.

KERN Pictograms



Internal adjusting (CAL): Quick setting of the balance's accuracy with internal adjusting weight (motordriven).



Adjusting program (CAL): For quick setting of the balance's accuracy. External adjusting weight required.



Memory: Balance contains memories, e.g. for item data, weighing data, tare weights etc. PLU.



Data interface RS-232: To connect the balance to a printer, PC or network.



RS 485 data interface: To connect the balance to a printer, PC or other peripheral devices. High tolerance against electromagnetic disturbance.



USB data interface: To connect the balance to a printer, PC or other peripheral devices.



Bluetooth data interface: To transfer data from the balance to a printer, PC or other peripheral devices.



Control outputs (optocoupler, digital I/O): to connect relays, signal lamps, valves, etc.



Interface for second balance: for direct connection of a second balance.



Network interface: For connecting the scale to an Ethernet network. With KERN products you can also use a universal RS-232/LAN converter.



GLP/ISO record keeping: of weighing data with date, time and identification-no. Only with printers from KERN.



Piece counting: Reference quantities selectable. Display can be switched from piece to weight.



Recipe level A: Separate memory for the weight of the tare container and the recipe ingredients (net total).



Recipe level B: Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through displays.



Recipe level C: Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through displays. Additional convenient functions, such as bar-code and back calculation functions.



Percentage determination: Determining the deviation in % from the target value (100%).



Weighing units: Can be switched to e. g. non-metric units at the touch of a key. See balance model. Please refer to KERN's website for more details.



Weighing with tolerance range: Upper and lower limiting can be programmed individually, e.g. dosing/sorting and portioning.



Vibration-free weighing: (Animal weighing program) Vibrations are filtered out so that a stable weight is obtained.



Spray and dust protection IPxx: The type of protection is shown by the pictogram. For details see the glossary.



Stainless steel: the balance is protected against corrosion.



Suspended weighing: load support with hook on the underside of the balance.



Battery operation: Ready for battery operation. The battery type is specified for each device.



Rechargeable battery pack: rechargeable set.



Mains adapter: 230V/50Hz in standard version for Germany. On request GB, AUS or USA version.



Power supply: integrated in balance. 230V/50Hz in Germany. More standards e. g. GB, AUS, USA on request.



Strain gauges: Electrical resistor on an elastic deforming body.



Tuning fork principle: A resonating body is electromagnetically excited, causing it to oscillate.



Electromagnetic force compensation: Coil in a permanent magnet. For the most accurate weighings.



Single cell technology: Advanced version of the force compensation principle with the highest level of precision.



Verification possible: The time required for verification is specified in the pictogram.



DKD calibration possible: The time required for DKD calibration is shown in days in the pictogram.



Package shipment: The time required to manufacture the product internally is shown in days in the pictogram.



Pallet shipment: The time required to manufacture the product internally is shown in days in the pictogram.



Warranty: The warranty period is shown in the pictogram.

Precision is our business

To ensure the high precision of your balance KERN offers you the the appropriate test weight package for your balance, consisting of the test weight, box and DKD certificate, as proof of its accuracy ... the best pre-requisite for proper balance calibration.

In the extensive KERN test weight range, you will find test weights in the international OIML error limit classes: E1, E2, F1, F2, M1, M2, M3 with weights from 1 mg - 2000 kg.

The KERN DKD calibration laboratory for electronic balances and weights has been accredited by DKD since 1994 and today is one of the most modern and best-equipped DKD calibration laboratories for balances, test weights and force-measurement in Europe.

(DKD = German Calibration Service)

Thanks to the high level of automation, we can carry out DKD calibration of balances, test weights and force-measuring devices 24 hours a day, 7 days a week.

Range of services:

- DKD calibration of balances with a maximum load of up to 6 t
- DKD calibration of weights in the range of 1 mg – 500 kg
- Database supported management of checking equipment and reminder service
- Calibration of force-measuring devices
- DKD calibration certificates in the following languages
D, GB, F, I, E, NL, PL

Do you have questions about your scale, the corresponding test weight or the calibration service? Your KERN specialist dealer will be pleased to assist you.

Your KERN specialist dealer: